LAMP

HES INSTALLATION MANUAL FOR HES3D-E190 CONCEALED HINGE

(3-DIMENSIONAL ADJUSTABLE HINGE)

Order the Templaco Tools, Inc. Router Template.
Model: Lamp HES3D-E190

Read all instructions carefully for proper use.

COMPONENT PARTS

- CONCEALED HINGE 2 pcs
- Screw cover 2 pcs.ea. (Door side, Frame side)
- Flat Head Screw (5×30) 8 pcs×2
- Hex Key (Key size 4) 1 pc
- Template 1 pc
- INSTALLATION MANUAL

ITEM NO. / FINISH

ITEM NO.	FINISH
HES3D-E190DC	Silver
HES3D-E190DN	Champagne Gold
HES3D-E190BL	Black

DOOR SPECIFICATIONS

Recommended door dimensions :	
Maximum Door Weight	100kg (220lbs) per 2 hinges
	125kg (276lbs) per 3 hinges
Minimum Door Thickness	38mm (1-1/2)
Maximum Door Height	2400mm (94)
Maximum Door Width	900mm (36)

ADJUSTMENTS

Vertical adjustment	±3mm
Horizontal adjustment	+3mm、−2mm
Front / back adjustment	±1mm

HINGE PARTS

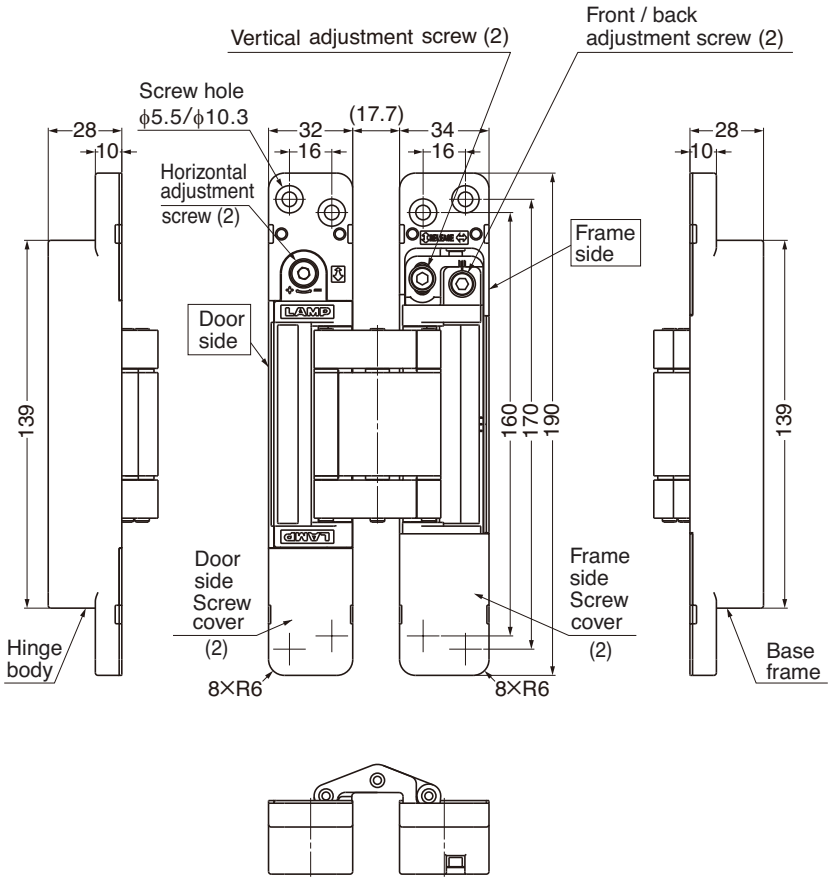

CUT OUT DRAWING

⚠Caution

Round edges of door and frame by applying cuts with "C1 and over" or "R1 and over." (Reference to "✻" in the drawing.)

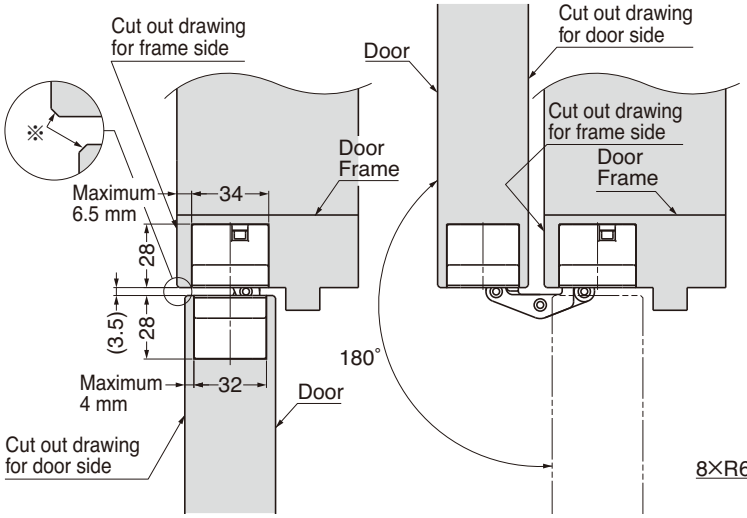

●Cut out drawing for door side

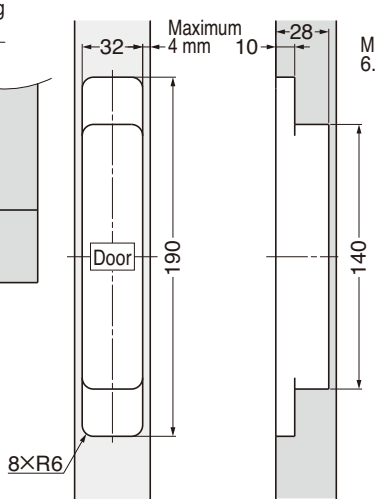
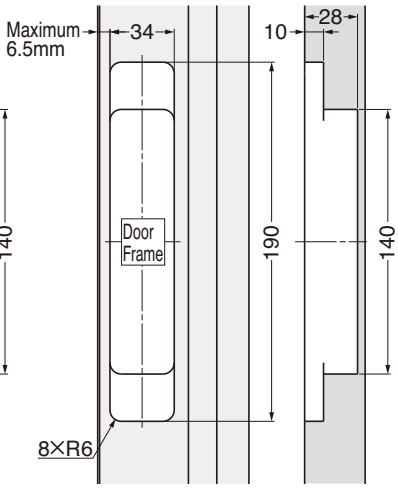
●Cut out drawing for frame side